

AAGRMK1

AA120G / AA240G Amp Rack Mount Kit

Safety Instructions

Please read carefully before installing or operating.

- Read all instructions carefully
- Heed all warnings
- Always assure amplifier power is Off before making any connections, or mounting
- Ensure that all electrical equipment is properly grounded
- Keep instructions for future reference
- Should any questions arise after reading this document, please call AtlasIED Tech Support at 800-876-3333

Note: The AAGRMK1 kit only works with AAG Series mixer amplifiers, and will not work with AA Series or AAPHD Series mixer amplifiers.


Note: The AARMK2-0 kit will not work with AAG Series mixer amplifiers.

Kit Contains

- (2) Rack Ears
- (4) M4 x 8mm Black Screws

Configuration

1. Disconnect the amplifier from the electrical source.
2. Remove the four feet from the bottom of the unit.
3. Align the enclosed rack ears to the chassis holes.
4. Use the enclosed screws to attach the rack ears to the side panels of the chassis. Secure firmly, do not over tighten.
5. Install the amplifier into the rack using rack rail screws and washers.
6. Disregard any additional pieces.

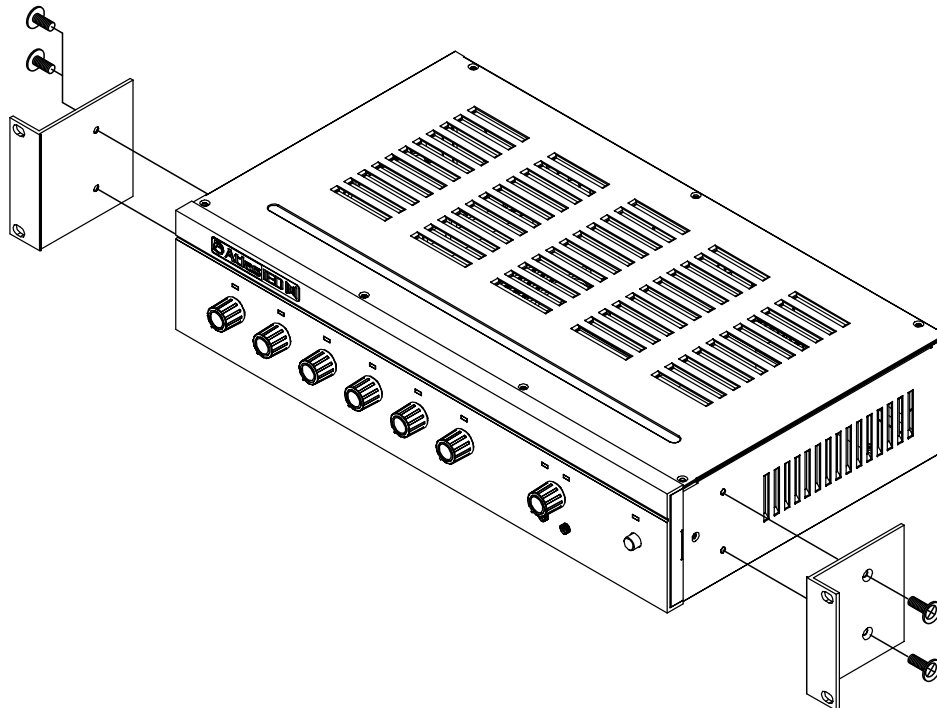

©2018 Atlas Sound L.P. The Atlas "Circle A", Soundolier, and Atlas Sound are trademarks of Atlas Sound L.P. IED is a registered trademark of Innovative Electronic Designs LLC. All Rights Reserved. All other trademarks are the property of their respective owners. All specs are subject to change without notice. ATS007793 RevA 6/24