

X3-17-FS-U
CAN-AM® MAVERICK X3 FRONT UPPER SPEAKER PODS
OWNER'S MANUAL



THANK YOU

Thank you for making the AWESOME decision to purchase our MTX Audio 4" weatherproof upper dash speakers for your Can-Am® Maverick X3. With a few simple tools from your trusty toolbox you'll have these installed in no time. The rotationally molded enclosures are built as a single piece, designed to take years of abuse without failure and they install quickly with only minor disassembly of the vehicle. So, congratulations on your purchase, thanks for your support and most importantly, enjoy the ultimate audio experience with MTX!

WE'RE HERE TO HELP

We're here to help with any installation or technical support. Visit mtx.com to chat, call 1-800-225-5689 to speak with an MTX Technical Support representative, or visit youtube.com/user/MTXAudioUSA to view product videos.

DON'T FORGET TO REGISTER YOUR PRODUCT

Don't forget to register your new MTX Audio product. Visit mtx.com/productregistration or scan the QR code to the right.

Model # _____

Serial # _____

Dealer's Name _____

Date of Purchase _____



IMPORTANT NOTICE

Whenever working on the vehicle, it is recommended to disconnect the battery prior to starting work. Failure to do so may lead to a risk of electric shock or equipment damage.

When connecting power and ground wires ensure that the red power wire is fused at the point where it is connected to the vehicle's battery. Failure to do so can result in damage to the vehicle if a short circuit develops between the vehicle connection point and the product.



FEATURES

- Custom Fit for Maverick X3 Dash
- Custom Quick Mount Bracket for Easy Installation
- Rotationally Molded Sealed Enclosure
- Factory Matched Texture
- Polypropylene Woofer and Mylar Dome Tweeter
- Installer Friendly Design
- Direct Fit, No Cutting Required

SPECIFICATIONS

- RMS Power Handling: 50-Watts
- Peak Power Handling: 100-Watts
- Sensitivity (2.83V/1m): 89.9dB
- Sensitivity (1W/1m): 85.6dB
- Frequency Response: 75Hz - 20kHz
- Impedance: 4Ω

FIT GUIDE

Turbo / Max Turbo.....	2018 - 2019
Turbo R / Max Turbo R.....	2017 - 2019
X-DS Turbo	2017
X-RS Turbo R / Max X-RS Turbo R.....	2017 - 2019
X-DS Turbo R / Max X-DS Turbo R	2018 - 2019
X-MR Turbo	2019 - 2021
X-MR Turbo R.....	2019
X-RC Turbo	2019 - 2021
X-MC Turbo R.....	2019
DS Turbo / Max DS Turbo	2020 - 2021
RS Turbo	2020
DS Turbo R / Max DS Turbo R	2020 - 2021
Max DS Turbo RR.....	2020
RS Turbo R / Max RS Turbo R.....	2020 - 2021
X-RC Turbo RR	2020 - 2021
X-RS Turbo RR / Max X-RS Turbo RR.....	2020 - 2021
X-MR Turbo RR / Max X-MR Turbo RR	2020 - 2021
X-MS Turbo RR	2020
X-DS Turbo RR / Max X-DS Turbo RR	2020 - 2021

IN THE BOX

- X3-17-FS-U Dash Speaker Pods (Left and Right Enclosures)
- Mounting Hardware
 - (4) T-20 Machine Screws
 - (2) T-20 Coarse Thread Screws


INSTALLATION

Step 1 - On the driver side, locate and remove seven (7) T-30 Torx screws and two (2) pushpin rivets from the driver's side upper dash panel.


- Two (2) located to the left of the steering wheel.




- Three (3) located at the front along the windshield line.

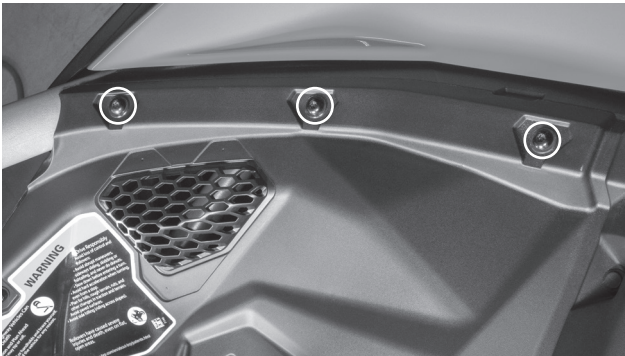

- Two (2) located on either side of the steering wheel.

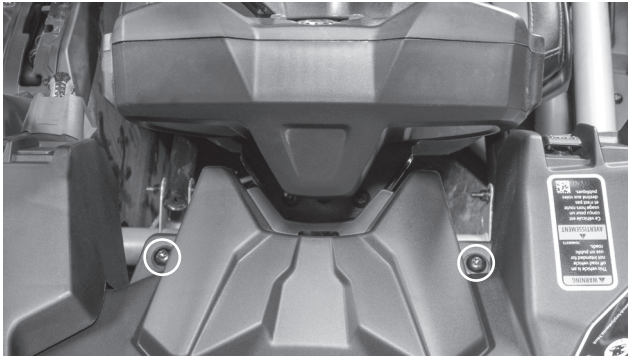

- Two (2) pushpins located on the right side of the panel at top center tray.

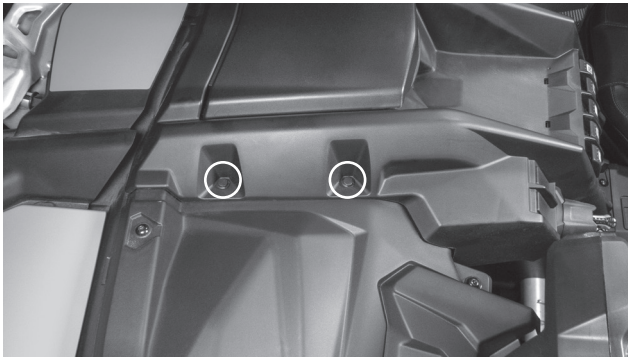

Step 2 - Disconnect the light switch harness from the back of the switch. **Note:** If any additional switches are mounted in this panel, disconnect at this time. If necessary, label harnesses to ensure proper reconnection.




Step 3 - Release and push the steering wheel to its lowest position for proper clearance.

Step 4 - Lift up on the dash panel releasing the harness clips from the bottom side as you do.




Step 5 - Once the panel is loose, disconnect the computer harness from the computer module attached to the panel and remove the panel from the vehicle. **Note:** It is not necessary to remove the computer module from the panel for installation of the speaker pod.

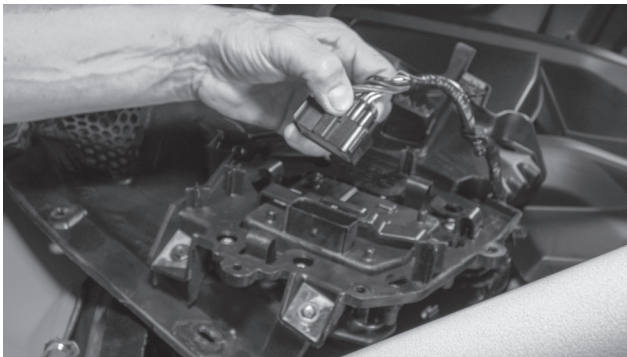

Step 6 - On the passenger side, locate and remove five (5) T-30 Torx screws, one with 10mm nut, and two (2) pushpin rivets from the passenger's side upper dash panel.


- Two (2) located on the right side upper dash, one has a 10mm nut located behind gas cap cover panel.

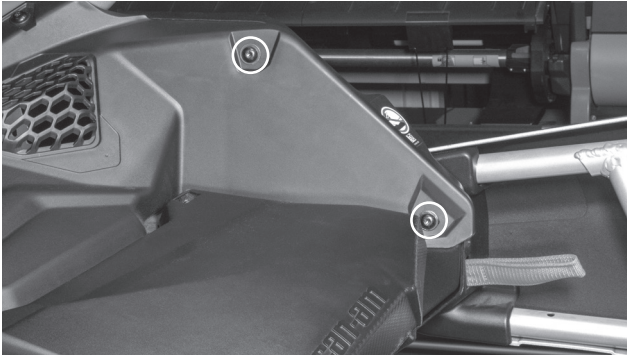

- Three (3) located at the front along the windshield line.




- Two (2) pushpins located on left side of the panel at top center tray.

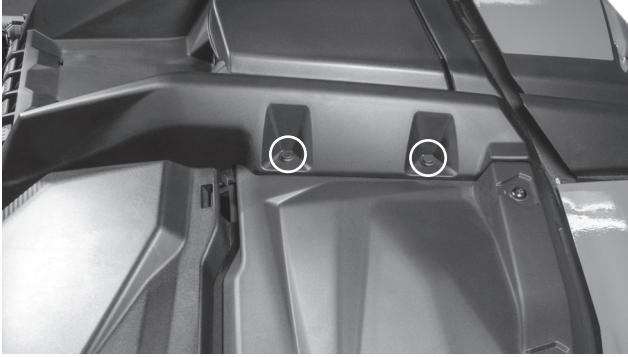

Step 7 - With hardware removed, lift up on the dash panel releasing the harness clips from the bottom side as you do.

Step 8 - Once the panel is free, remove the panel from the vehicle.


Step 9 - Prep the panels for installation by removing the speaker opening cover panel located on the bottom side of each panel. **Note:** Your vehicle may not have these installed if panels have been replaced or if audio equipment was previously installed. If missing, move on to the next step.

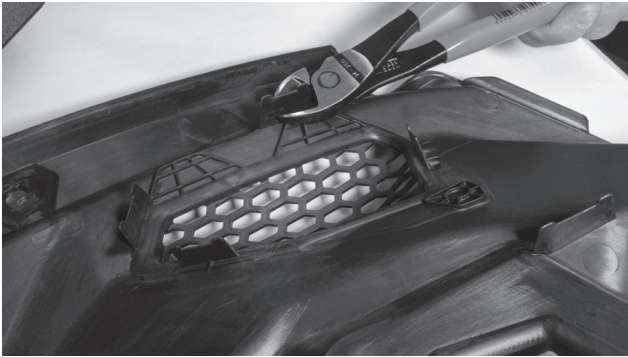


Step 10 - Using side cutters or a razor knife, remove the four (4) mounting tabs on the bottom side of the panel around the speaker opening to provide proper clearance for the pod installation. **Note:** These DO NOT need to be perfectly flush with the back of the panel.



Step 11 - Turn the panel over and locate the three (3) dimples around the molded speaker grill. Two (2) on top and one (1) on bottom of the grill area.

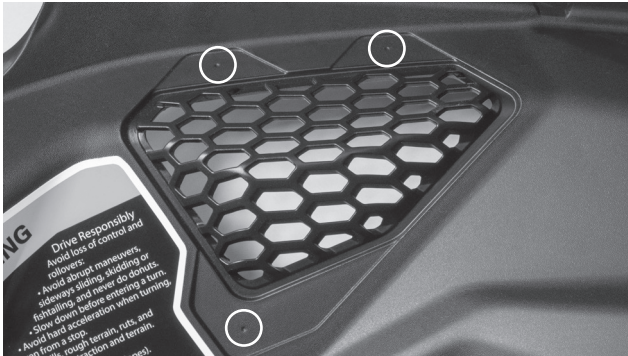

Step 12 - Using a $\frac{3}{16}$ " drill bit, drill through the panel at each dimple location.

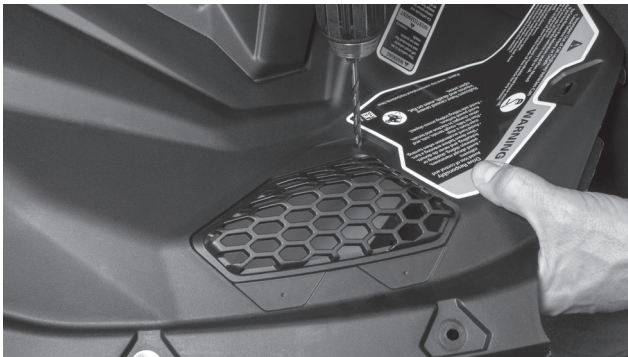

Step 13 - On the speaker pods, locate the single molded dimple at the bottom of the pod face.

Step 14 - Using a $\frac{1}{8}$ " drill bit, pre-drill the hole approximately $\frac{1}{8}$ " deep to allow the mounting screw to be started by hand.



Step 15 - Align the appropriate speaker pod on the back of the panel with the drilled holes and begin securing using two (2) machine screws through the front of the panel and into the threaded holes located on the pod bracket.



Step 16 - Once started, install the coarse thread screw through the single bottom hole into the pod and tighten.



Step 17 - Tighten the machine screws securing the pod to the panel.



Step 18 - Repeat this process on the other panel.

Step 19 - With the panels back at the vehicle, route the pod speaker wire to its connection point.
Note: If installing as part of a kit, the upper pod plug will connect to the pigtail located as part of the lower pod harness. If not installing as part of a kit, the plug will need to be removed and additional speaker wire added.

Step 20 - It is recommended to test the system prior to full reassembly. Reinstall the dash panels in reverse order as removed, remembering to reconnect the computer module and any switches disconnected during disassembly.

Step 21 - Reassemble and go ride.

NOTES

NOTES

WARRANTY PERIOD

At MTX Audio we engineer products that will stand up to the test of time. We also realize that from time to time a problem may occur. That's why our products carry a 2-year limited warranty that begins at the time of sale to the end user.

Of course, we're here to help. If you experience an issue with any of our products within the warranty period, please contact our customer service technical line at 1-800-CALL-MTX to help troubleshoot your issue. If, after speaking with our technical experts it is determined that a problem lies with the product, the technician will provide you with a Return Authorization number and all relevant details you'll need to get the product taken care of.

MITEK WARRANTY

MiTek Mobile products (including, but not limited to: MTX, Coustic, Streetwires, Xtant, BassSlammer, and Thunder Marine) purchased in the USA from an AUTHORIZED MITEK DEALER are guaranteed against defects in material and workmanship for the period of time specified. The warranty period begins the day the product is purchased by the end user, and this warranty is limited to the original retail purchaser of product. Products found to be defective during the warranty period will be repaired or replaced with equivalent product by MiTek at no charge. This warranty is void if it is determined that unauthorized parties have attempted repairs or alterations of any nature, and the warranty does not extend to cosmetics or finish. MiTek disclaims any liability for other incurred or consequential damages resulting from product defects. MiTek's total liability will not exceed the purchase price of the product.



Let's Get Social
mtx.com



Like, Follow, & Subscribe

© 2021 MiTek Corporation. All rights reserved. MTX is a trademark of MiTek Corporation. All other trademarks are property of their respective owners. Designed and Engineered in the U.S.A.

Due to continual product development, all specifications are subject to change without notice.

MTX Audio, 4545 East Baseline Rd. Phoenix, AZ 85042 U.S.A. 1-800-225-5689

MTX006224 RevA 1/21 • 21A10811 • AW0015866